(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 31 March 2005 (31.03.2005)

PCT

(10) International Publication Number WO 2005/028991 A2

(51) International Patent Classification7:

F41B

(21) International Application Number:

PCT/US2004/030350

(22) International Filing Date:

16 September 2004 (16.09.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/503,178


16 September 2003 (16.09.2003) U

- (71) Applicant (for all designated States except US): NA-TIONAL PAINTBALL SUPPLY, INC. [US/US]; 570 Mantua Boulevard, Sewell, NJ 08080 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CAMPO, John, E. [US/US]; 13 Hanover Drive, Medford, NJ 08055-8619 (US).

- (74) Agent: BALLARINI, Robert, J.; Volpe and Koenig, P.C., United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, PA 19103 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRONIC PAINTBALL MARKER

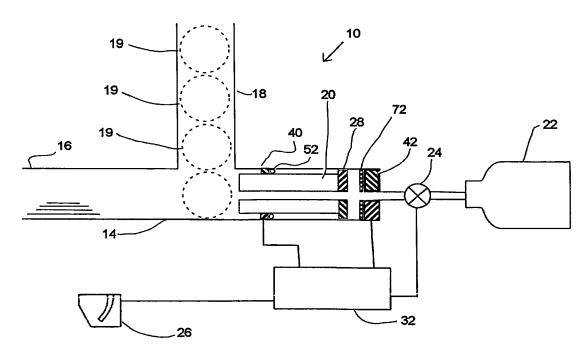

(57) Abstract: The present invention is directed to an electronically controlled paintball marker with magnetic control, having a trigger in communication with an electronic controller and a bolt configured to reciprocate in response to a magnetic force applied to a portion of the bolt during a firing sequence. Actuation of the trigger initiates a firing sequence activating electromagnets controlled by the electronic controller.

WO 2005/028991 A2



Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.